

Installation of Inner Rails to Console


1. Remove rail/slide assembly from cushions.



2. Place rail assembly on flat surface and fully extend slide as shown in picture below.



3. With fully extend slide (picture 2), find the release latch and pull and remove inner rail

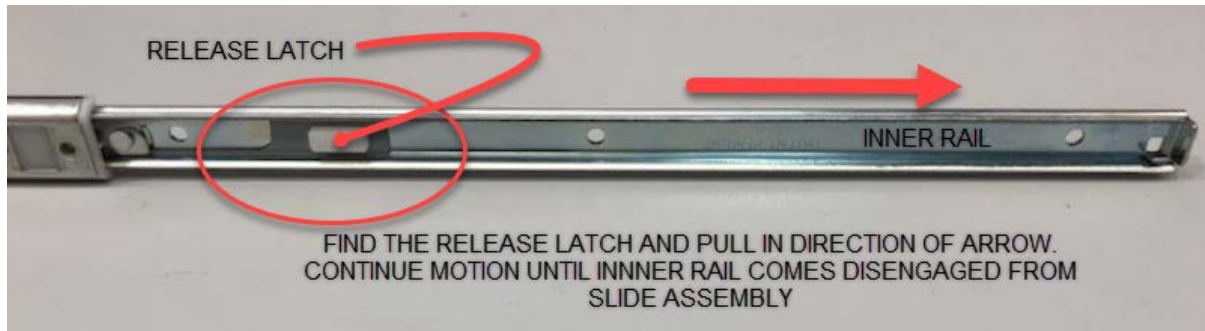

4. Take the 1U console out of packaging and lay on flat surface. The inner rail can go either on the left or right side of basepan with latch mechanism toward the rear of unit. Mounting locations can be easily identified by the notched plastic and the basepan is stamped with the letter "A".



5. Place flat side of inner rail on side of basepan. Align holes with pan inserts marked "A". Thread 6-32 screws (qty 2) to hold rail to basepan. Note: Use 8-in/lb of torque to secure screw in place.

Front Mount




Rear Mount



6. Repeat steps 2-5 for the other rail/slide assembly. The inner rail installation is complete.

7. To unlock and retract the rail/slide assembly from step 2, depress lever and secondary member is free to retract.

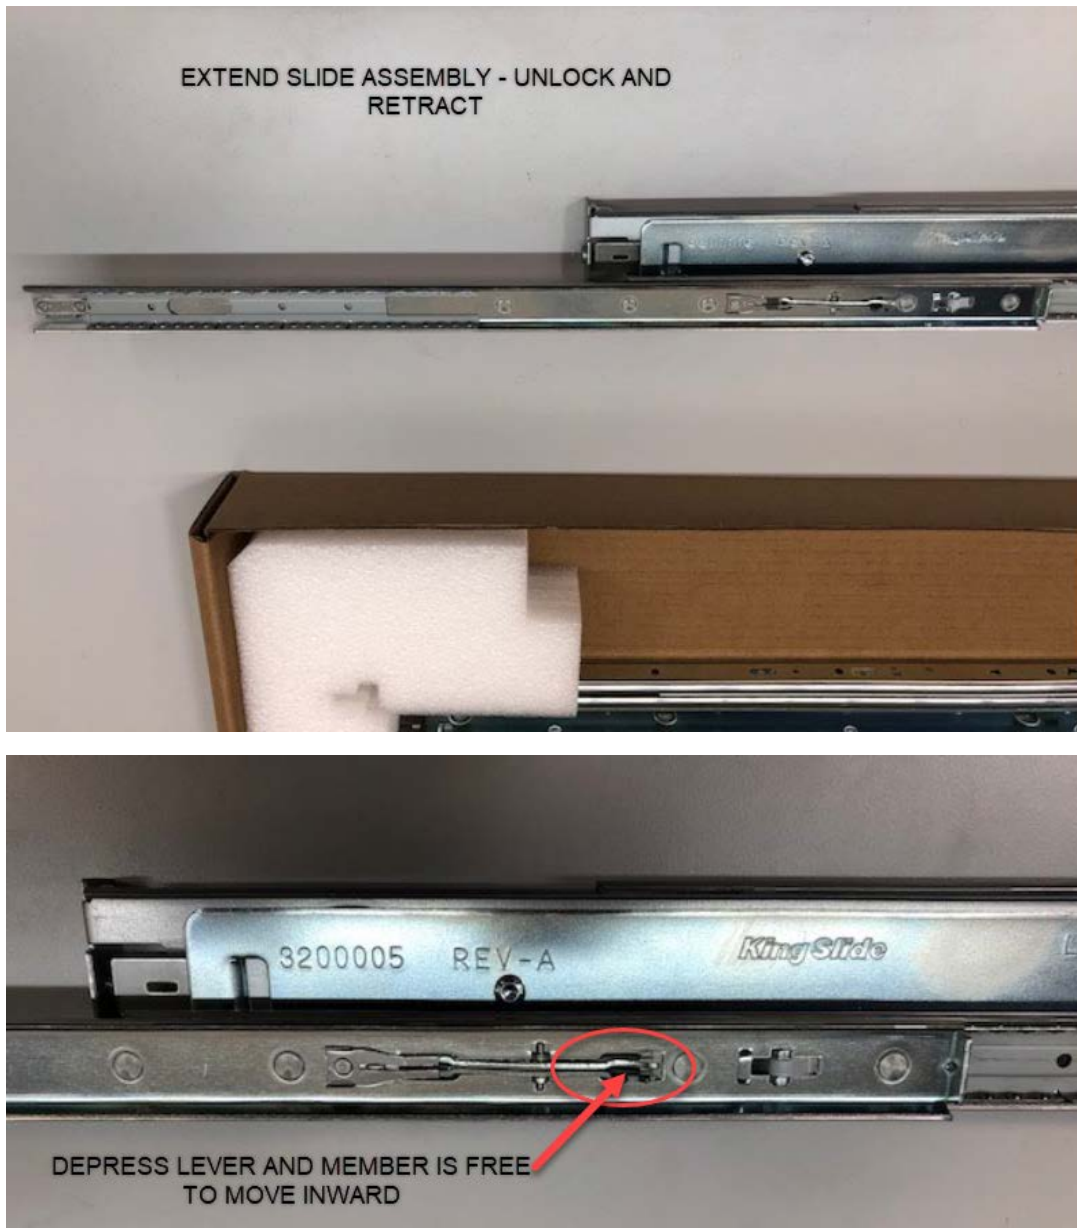

Note: Keep expose assembly free of debris while slide is apart! There is a light film of grease on ball bearing race, so limit touching mechanism.

Reference the 17.3 user manual to perform installation of rail assemblies and console to the rack.

Rack Hardware Kit Content:

Left Rail/Slide Assembly – Qty 1

Right Rail/Slide Assembly – Qty 1

CMA/Brace Rail Assembly – Qty 1

Left/Right CTO Bracket – Qty 1/ea.

M6 Screw – Qty 2

6-32 x .250L – Qty 6

Product homepage:

<http://www.UPtyma.com>

User Guide

To download the user guide:

Go to the UPtyma website: (<http://www.UPtyma.com/User-Guide>)

Safety and regulatory compliance

For safety, environmental and regulatory information, see the UPtyma website

EAC

Manufacturer

UPG Company LLC, Address: 7865 Northcourt Road, Houston Texas 77040, U.S.

Recycle



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your **waste** equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

UPG

UPG Company LLC, 2018

The information contained herein is subject to change without notice. The only warranties for UPG products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. UPG shall not be liable for technical or editorial errors or omissions contained herein.

Part Number: 78000102/April 2018/Edition 1